

OPTIONS**Power Supply**

- Plug Adapter (PLG)
- Hardwired Less Transformer (HLT)

Flow Rate

- 1.5 gpm (6 Lpm) (1.5GPM)
- 0.5 gpm (2 Lpm) (0.5GPM)
- 0.35 gpm (1 Lpm) (0.35GPM)
- 1.0 gpm (4 Lpm) (1.0GPM)

Spray Type

- Aerated (AER)
- Multi-Laminar (MLM)

Finish

- Polished Chrome (CP)
- Brushed Nickel (BN)
- Brushed Stainless (SF)

Mixer

- Integrated Side Mixer (ISM)
- Mixer Not Included

Special Features

- IQ Click (IQ)
- IC Click (IC)
- Drain Pop Up (DPU)
- Less Logo (LL)

Compliances & Certifications

- ADA Compliant
- CEC Compliant
- cUPC Low Lead Compliant
- ASME A112.18.1 Compliant
- Proposition 65
- TAS
- UPC Certified
- UPC Low Lead Compliant
- cUPC Certified
- NYC604.4

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet.

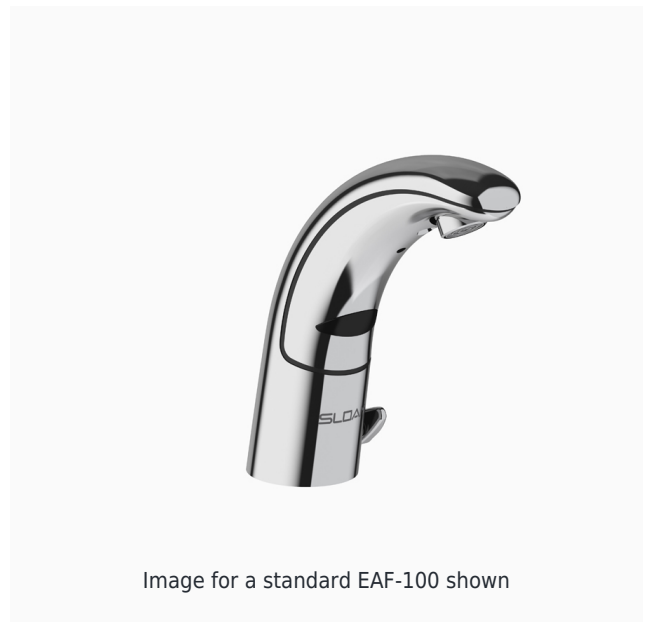


Image for a standard EAF-100 shown

DESCRIPTION

Optima® Hardwired-Powered Deck-Mounted Mid Body Faucet

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- Double Infrared Sensors with Automatic Setup and Indicator Light
- Automatic Self-adapting Sensor Technology
- Magnetic Solenoid Valve
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- 6 Volt DC Plug-in Adapter (must be ordered separately for Less transformer (-LT) faucets)
- Daisy Chain Electrical Splitter Cable not included with Less transformer (-LT) faucets
- Appropriate Mounting Hardware included
- Optional 24 Hour Sentinel Activation
- 3 year limited warranty
- Includes EAF44 Power Splitter

DOWNLOADS

- [EAF 100/150 Installation Instructions](#)
- [EAF 100/150 \(SP\) Installation Instructions](#)
- [Optima Plus EAF 100 Repair and Maintenance Guide](#)
- [Faucet Spray Heads Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

VIDEOS

 Sloan Connect App[®]