



OUTDOOR BOTTLE FILLERS

GY Series

MODEL GYV34
BARRIER-FREE OUTDOOR PEDESTAL
BI-LEVEL DRINKING FOUNTAIN WITH
BOTTLE FILLER

STANDARD FEATURES

- Adult ADA compliant
- Pushbutton and hands-free sensor operated Bottle filler
- Battery pack 6-AA
- Laminar flow water supply to bottle filler
- Resistant to sunlight, heat, moisture and wear
- 18 Gage, 304 stainless steel drinking fountain bowls
- 12 Gage, heavy duty stainless steel construction with corrosion and scratch resistant finish
- Stainless steel, anti-rotation non-squirt bubbler
- 100-mesh inlet strainer
- Lead and cyst filter (Not available with FRU option)
- Access cover, heavy duty stainless steel, vandal resistant

SUGGESTED SPECIFICATIONS

Barrier-free drinking fountains with bottle filler shall be Murdock model GYV34. Construction shall be 12 gage, all stainless steel with 18 gage stainless steel fountain bowls. Pedestal base shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. Bottle filler shall be activated by a 9-volt sensor or a pushbutton as standard. Unit shall contain a 100-mesh inlet strainer, lead and cyst filter, 6-AA battery pack and laminar flow spout. Self-closing pushbutton, needing less than 5 pounds of force, shall activate internally mounted valves with adjustable stream regulators. Bubblers shall be stainless steel with non-squirt feature and operate on water pressure range of 20-105 PSIG. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA requirements when mounted appropriately.



Model GYV34 Shown

MODEL: (Must Specify)

- GYV34 Satin Stainless Finish (Shown)
- GYV35 Green Powder-Coated
- GYV36 Red Powder-Coated
- GYV37 Blue Powder-Coated

OPTIONAL ACCESSORIES

(additional costs may be incurred)

- CV Cartridge valve on fountains (Not available with freeze-resistant valve)
- FRU3 Underground freeze-resistant, 3 valves¹ (Less filter and sensor)
- FRU4 Underground freeze-resistant, 4 valves¹ (Less filter and sensor)
- IAP In-ground anchor plate
- LOGO Customer specified logo
- MO Bottle filler operated by pushbutton only (Standard with freeze-resistant valves)
- PF Pet fountain¹

Option Notes:

¹See separate option sheet



Please visit www.murdockmfg.com for most current specifications.

Complies with the following standards:



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com



Member of MORRIS GROUP INTERNATIONAL



OUTDOOR BOTTLE FILLERS

GY Series

MODEL GYV34
 BARRIER-FREE OUTDOOR
 PEDESTAL BI-LEVEL DRINKING
 FOUNTAIN WITH BOTTLE FILLER

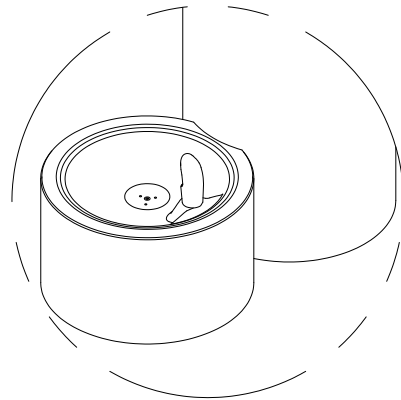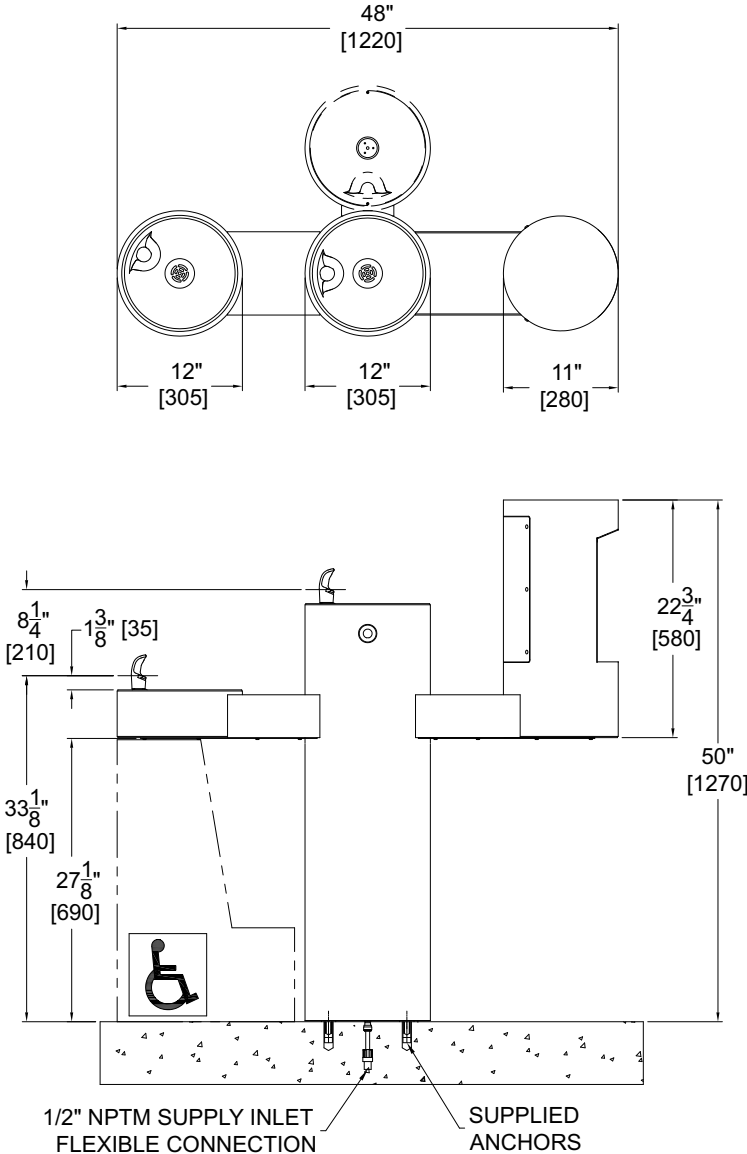

**OPTIONAL -PF PET FOUNTAIN
 DETAIL**

* Valve specifications:
 Minimum/Maximum Pressure
 30 to 100 PSI.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____
	Company _____	
	Contact _____ Title _____	
	Signature (Approval for Manufacturing) _____	Date _____
	All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.	

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
 Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

