

Penal-Ware[®] 1707 Series

Straddle - Washout Urinal - ADA Compliant



Please visit www.acorneng.com for most current specifications.

Straddle - Washout Urinal - ADA Compliant

Fixture is arranged to be installed on finished wall and serviced from an accessible pipe chase. Optional Wall Sleeve or Metal Template is recommended for all installations for required wall openings. Unit conforms with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority. Fixture is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish. Interior has a matte finish. Fixture is back wall washdown type, and is optionally available with a continuous flushing rim that washes all four walls. Corners are coved to facilitate cleaning. P-trap is fully enclosed. Back of fixture is sound-deadened with fire-resistant material. There are no accessible voids or crevices where contraband can be concealed.

Urinal is washout type. Flushing connection is 3/4" NPT male. Bottom is sloped to an integrally welded high capacity stainless steel beehive dome strainer. P-trap has a minimum of 2" seal.

Mounting Hardware is furnished for walls up to 8" thick.

GUIDE SPECIFICATION

Provide and install Acorn Penal-Ware Straddle - Washout Urinal (specify model number and options). Urinal shall be back wall washdown type. Fixture shall be fabricated from 14 gage, type 304 stainless steel and shall have coved corners to facilitate cleaning. Bottom shall be sloped to an integrally welded high capacity stainless steel beehive dome strainer. Construction shall be seamless welded and exterior surfaces shall have a satin finish. P-trap shall be fully enclosed. Fixture shall be furnished with necessary fasteners for proper installation. Units to conform with ANSI, UFAS and ADA requirements for accessibility.

Page 1 P.1707

Revised: 08/21/18

Penal-Ware®: 1707 Straddle-Washout Urinal - ADA Compliant

WALL THICKNESS AND TYPE (Must Specify)

Type: Concrete Block Steel Thickness

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER 1707 Washout Urinal

SUPPLY (Must Specify) Top (Exposed) 🗆 -Т 🗆 -W Wall (Concealed)

FIXTURE MOUNTING AND WASTE (Must Specify) Off-Floor, Wall Outlet **2** -1

FLUSH VALVE GPF's (Must Specify)

□ 1.0 GPF (Not Available in California)


1.5 GPF (Not Available in California)

Please visit www.acorneng.com for most current specifications.

- FLUSH VALVE OPTIONS (Must Specify) ***REFER TO ACORN DURA-WARE ACCESSORIES FOR** FLUSH VALVE COVER #2802, BOX #2803-1 AND PANEL #2898* -EVSFV Master-Trol® Electronic Flush Valve (N/A for Top Supply) -EVSPFV Master-Trol® Electronic Flush Valve w/ Piezo Button (N/A for Top Supply)
- Flush Valve, Mechanical (N/A for ADA) 🗋 - FV
- -FVBO Flush Valve by Others
- Flush Valve, Hydraulic (N/A for Top Supply) 🗋 -FVH
- 🗋 -FVL Flush Valve, Lever Handle (Wall Supply)
- Master-Trol® PLUS Electronic Flush Valve 🗋 - MTPFV
- -MTPPFV Master-Trol® PLUS Electronic Flush Valve w/ Piezo Button
- □ -MVCFV Time-Trol[®] Electronic Flush Valve (N/A for Top Supply)


PRODUCT OPTIONS

- Continuous Flushing Rim -CFR
- 🗋 -EG Enviro-Glaze Color, Specify:
- -FVT Flush Valve Thru Wall Connection
- 🗋 -MT Metal Template
- 🗋 -SW Wall Sleeve
- 🗋 -TF Transformer, 120VAC to 24VAC (-MVCFV option)
- 🗋 -TG 12 Gage Housing

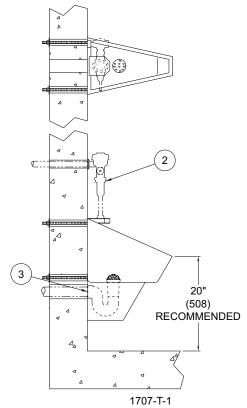

NOTES:

- 1. Optional -FV Flush Valve Wall Supply
- 2. Optional -FV Flush Valve Top Supply
- 3. Urinal Waste Outlet

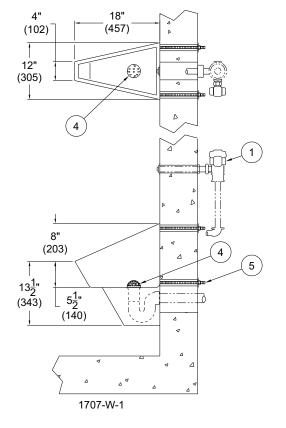

4. Beehive Strainer

5. Wall Mounting Anchors

MWARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acom assumes no responsibility for use of void or superseded data. © Copyright 2006 Acom Engineering Company		
Selection Summary	Approved for Manufacturing	
Model No. & Option	CompanyTitle	
Quantity	Signature Date	
Page 2 P.	.707 Revised: 08/21/18	

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • Fax: (626) 961-2200 • www.acorneng.com • E-mail: info@acorneng.com