


REFERENCE DRAWING	
Flush Valve Access Pan Model No. 2898	el 9908-399-001

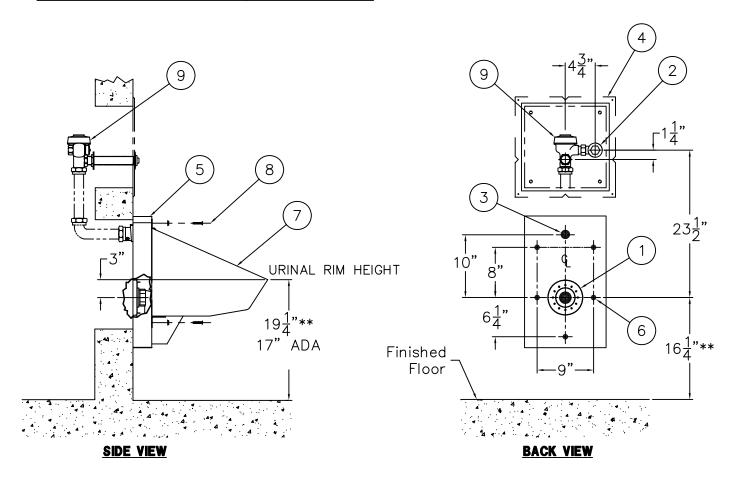

INSTALLATION INSTRUCTIONS:


- A-ROUGH-IN FOR THE FOLLOWING:
 - 5-1/2" RECESSED GASKET FLANGE (1). FLUSH VALVE INLET 1" NPT (2).

 - FIXTURE FLUSHING CONNECTION 1-1/2" NPT (3).
- B-IF AN OPTIONAL 2898 FLUSH VALVE ACCESS PANEL (4) IS REQUIRED FOR BACK SUPPLY FLUSH VALVE, INSTALL SLEEVE (SEE DRAWING #9908-399-001).
- C- ANCHOR ROUGH-IN ADAPTER BOX (5)**AGAINST** WALL THROUGH 7/8" DIA ANCHOR HOLES (WALL ANCHORS & HARDWARE BY OTHERS).
- D-MOUNT URINAL (7) TO ADAPTER BOX (5) BY USING SCREWS (8) PROVIDED.
- E- SUFFIX -FV OPTIONAL CONNECT FLUSH VALVE. CONNECT FLUSH VALVE (9) PER MANUFACTURERS' RECOMMENDATIONS.


NOTE: FOR ADA UNITS REFER TO ADA ACCESSIBILITY GUIDELINES FOR COMPLETE INSTALLATION REQUIREMENTS.


FLUSH VALVES MUST BE HYDRAULICALLY ACTUATED OR SUPPLIED WITH AN ADA HANDLE. MAX CONTROL HEIGHT IS 44" ABOVE FINISHED FLOOR.

WHEN SUFFIX OPTION -ADA IS SPECIFIED; 19-1/4' RIM HEIGHT BECOMES 17" MAXIMUM. ALL VERTICAL DIMENSIONS INDICATED** DECREASE ACCORDINGLY.

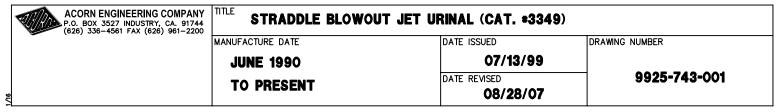



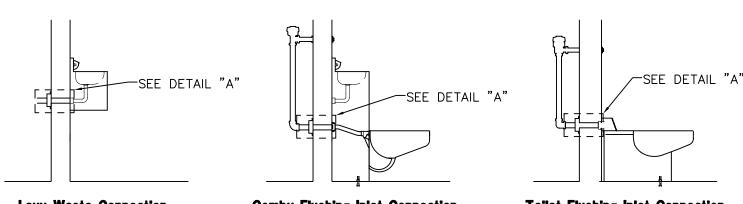

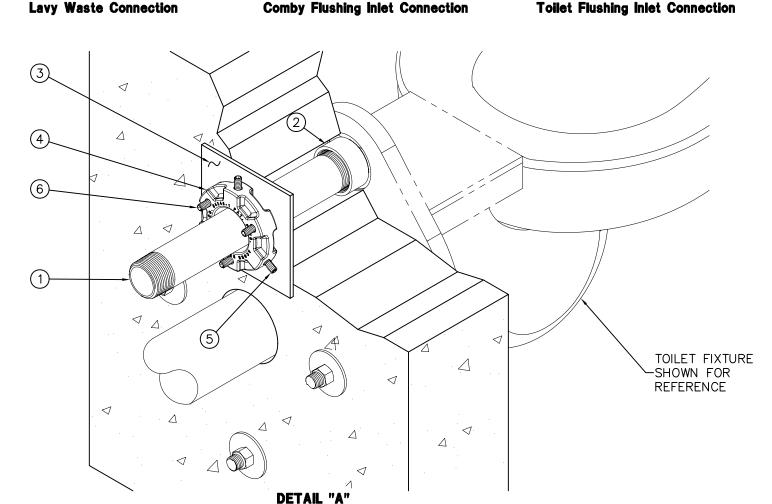

INSTALLATION INSTRUCTIONS:

- A- SECURE PIPE (1) TO FIXTURE CONNECTION (2) THROUGH WALL.
- B- PLACE THRUST PLATE (3) FLUSH AGAINST WALL.
- C- PLACE ANCHORING COLLAR (4) FLUSH AGAINST THRUST PLATE (3).
- D- HOLD UNIT AGAINST WALL, PARALLEL TO THE FLOOR.
- E- TIGHTEN SCREWS (5) (3 PLACES) TO SECURE ANCHORING COLLAR (4) TO PIPE (1).
- F- TIGHTEN SCREWS (6) (3 PLACES) TO PULL PIPE (1)
 AND PUSH AGAINST THRUST PLATE (3) IN ORDER
 TO HOLD FIXTURE WITH TENSION AGAINST WALL.

